


SPIR STAR, TYPE 4



Bezpečnostní faktor	1:2.5
Maximální teplota (°C)	80
Výztužné vrstvy	4
Výztužné materiály	Ocelový drát
Minimální teplota (°C)	-30

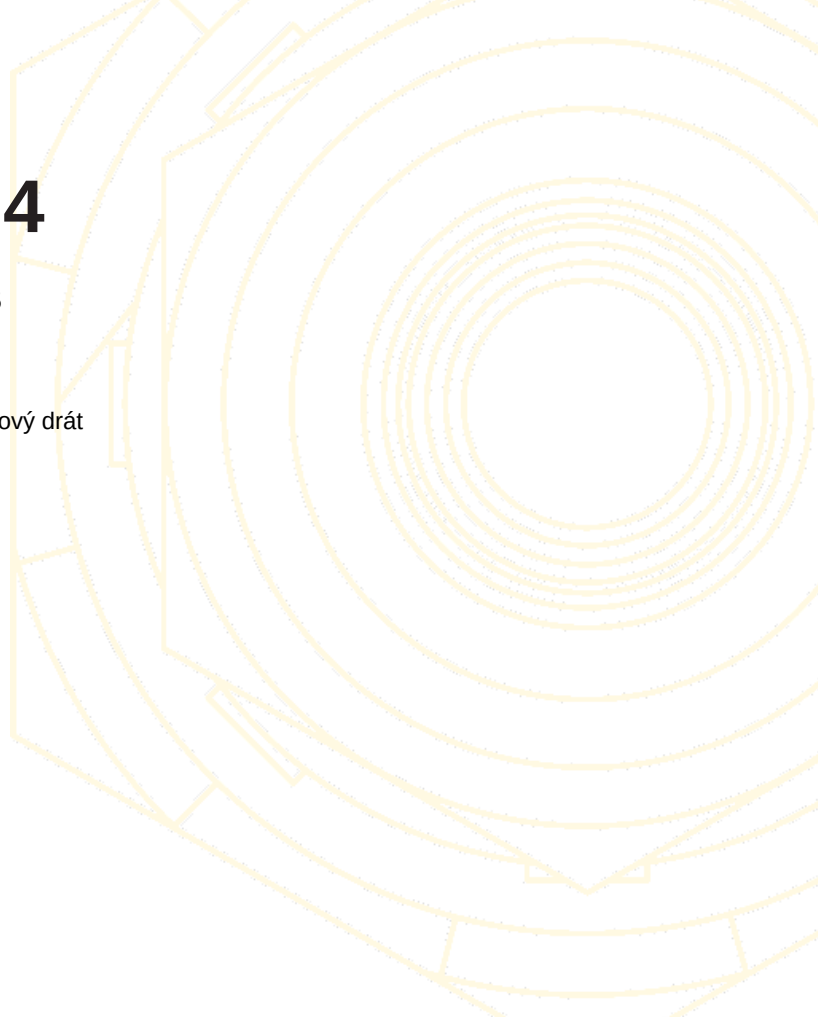

íslo položky	Pracovní tlak (MPa)	Polomr ohybu (mm)	ID (palce)	ID (mm)	OD (mm)	váha (kg)
12013002	216	130	1/8"	4	10.3	0.23
12013003	180	150	3/16"	5	11.2	0.26
12013004	150	180	1/4"	6.3	12.6	0.3
12013005	150	200	5/16"	8	14.6	0.39
12013006	150	200	3/8"	9.9	18.4	0.69
12013008	128	200	1/2"	12.8	21.4	0.8
12013010	100	250	5/8"	16	25	0.94
12013012	100	250	3/4"	19.8	29.6	1.35

