


Filtr regulator kit

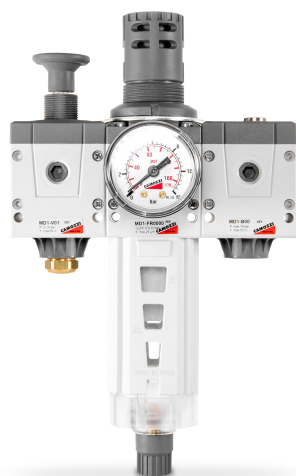

Skupina produkt	517
Výrobce	Camozzi
Vstup	G 1/8" F, G 1/4" F or G 3/8" F
Výstup	G 1/8" F, G 1/4" F or G 3/8" F
Maximální pracovní tlak (Bar)	10
Minimální pracovní tlak (Bar)	0.5

Filter Regulator Kit is a module assembled air treatment unit to ensure the air quality in the compressed air systems. Manually operated on-off valves for safe shutdown of compressed air. The filter regulator has a 25 m particle filter that removes condensate and particles. The condensate is drained when the filter regulator is pressure-free, or manual drainage. The distribution block provides the possibility to connect several compressed air units at the same time.

íslo položky	Filtr (μm)	Maximální vstupní tlak (bar)
CMD1FR0000S03	25	16